
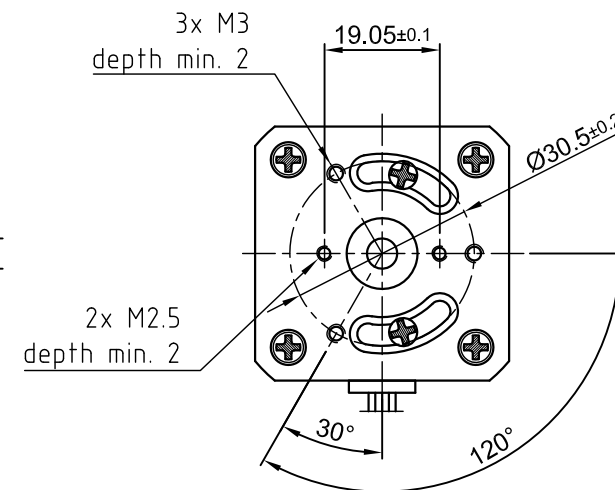
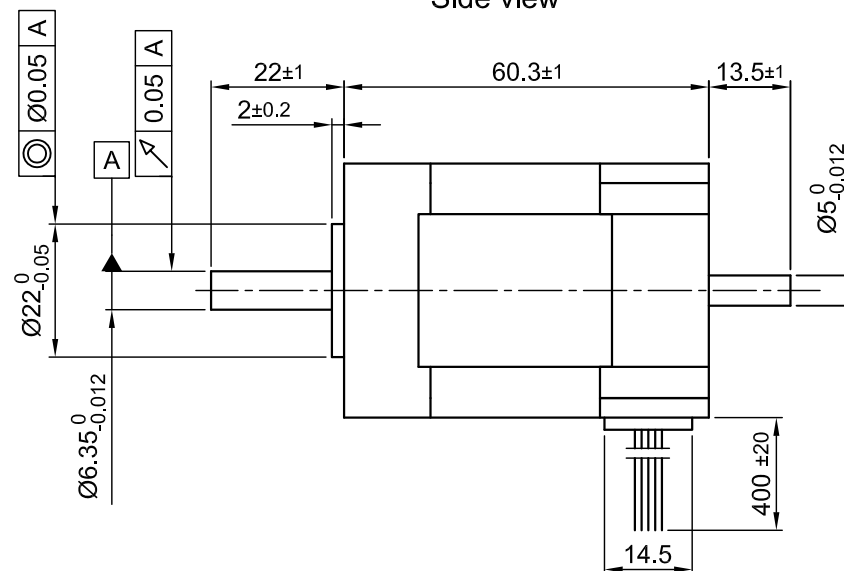


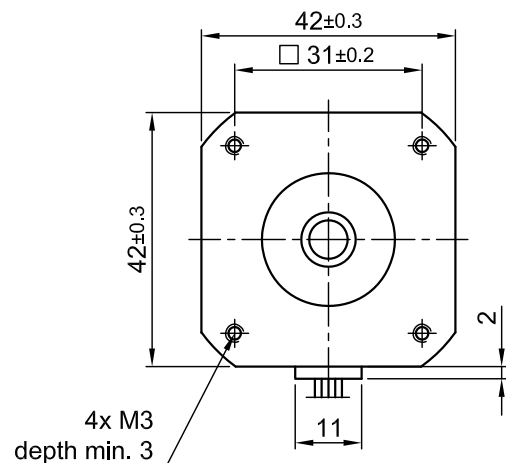

AXIAL-FORCE F_a (N)	$F_a=10$	
DISTANCE a (mm)	20	
RADIAL-FORCE F_r (N)	28	
	AXIAL	RADIAL
SHAFT PLAY (mm)	0.08	0.02
AT LOAD MAX: (N)	4.5	4.5

				 Nanotec[®] PLUG & DRIVE			APVD	<i>G.S.</i>	18.08.16	<i>BRUSHLESS DC MOTOR</i>	
							CHKD				
				Surface specification DIN ISO 1302	General tolerances DIN ISO 2768- cH	Work piece edge DIN ISO 13715	DRN	<i>A.S.</i>	18.08.16	DWG.NO	
REV	DESCRIPTION	DATE	DRN				SIGNATURE	DATE	DB43M024030-B		