



DIMENSION (UNIT : mm)

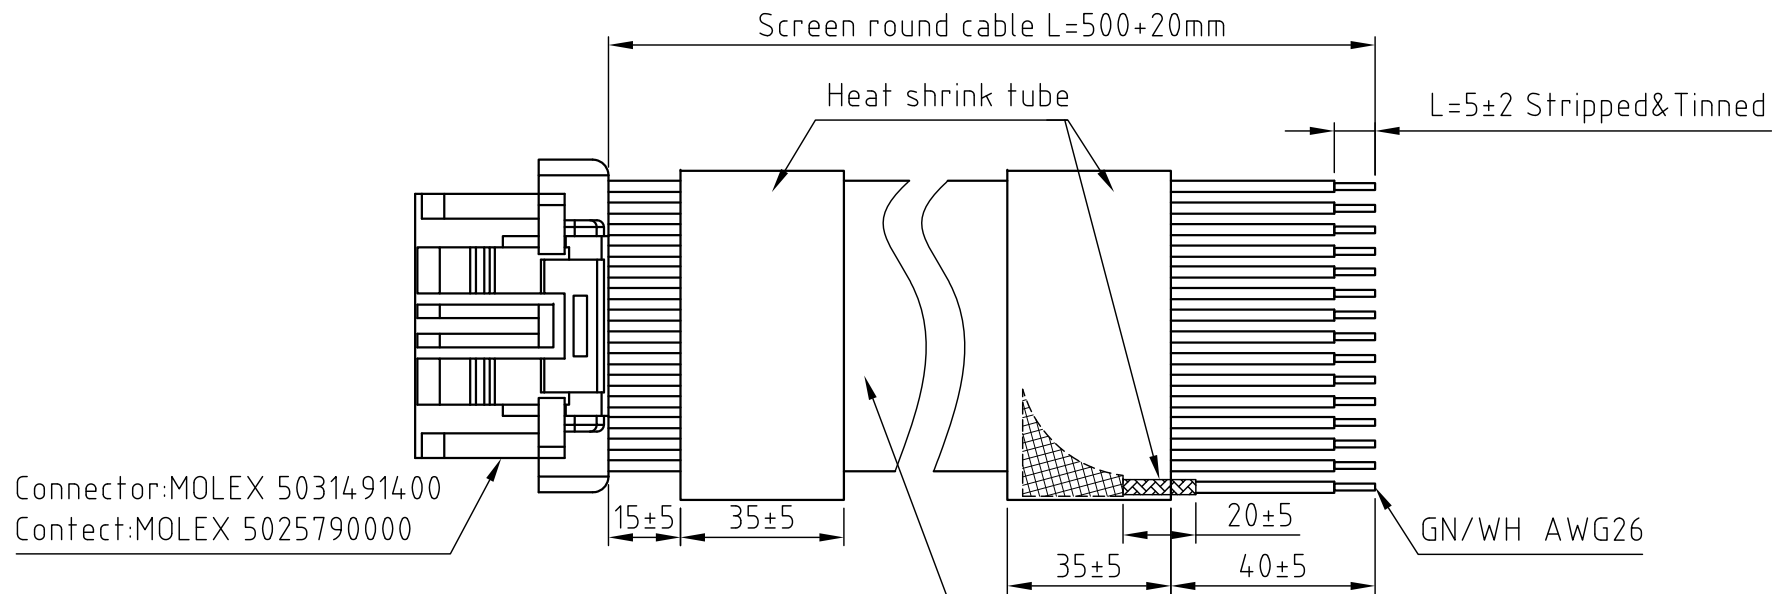

All wires AWG26

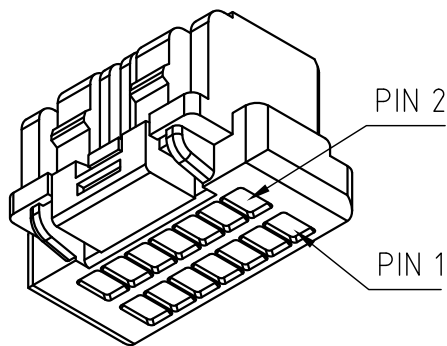

PIN ASSIGNMENT	
PIN NO.	COLOR
PIN 1	BK
PIN 2	GN
PIN 3	BN
PIN 4	GY
PIN 5	PK
PIN 6	YE
PIN 7	BN/GN
PIN 8	VT
PIN 9	GY/PK
PIN 10	RD/BU
PIN 11	WH/GN
PIN 12	WH
PIN 13	BU
PIN 14	RD
	GN/WH (shielding)

CABLE SPECIFICATION		
Cable Length	mm	500
Cable Diameter	mm	6.7
Cable Material		PVC
Cable Color		Grey
Conductor Insulation		PVC
Conductor / Cross - Section		(14x0.14)C
Shielded		Yes
Bending Radius (flexible)		min. 15 xφ
Bending Radius (stationary)		min. 6 xφ

				 Nanotec [®] <i>PLUG & DRIVE</i>			APVD	R.S.	20.08.25	<i>EXTENSION CABLE</i>
							CHKD	GYQ	20.08.25	
1	CABLE INFORMATION, SHIELDING WIRE	04.11.25	L X	Surface specification DIN ISO 1302	General tolerances DIN ISO 2768-C	Work piece edge DIN ISO 13715	DRN	L X	20.08.25	
REV	DESCRIPTION	DATE	APVD				SIGNATURE		DATE	ZK-MCM-14-500-S