


DIMENSION (UNIT : mm)

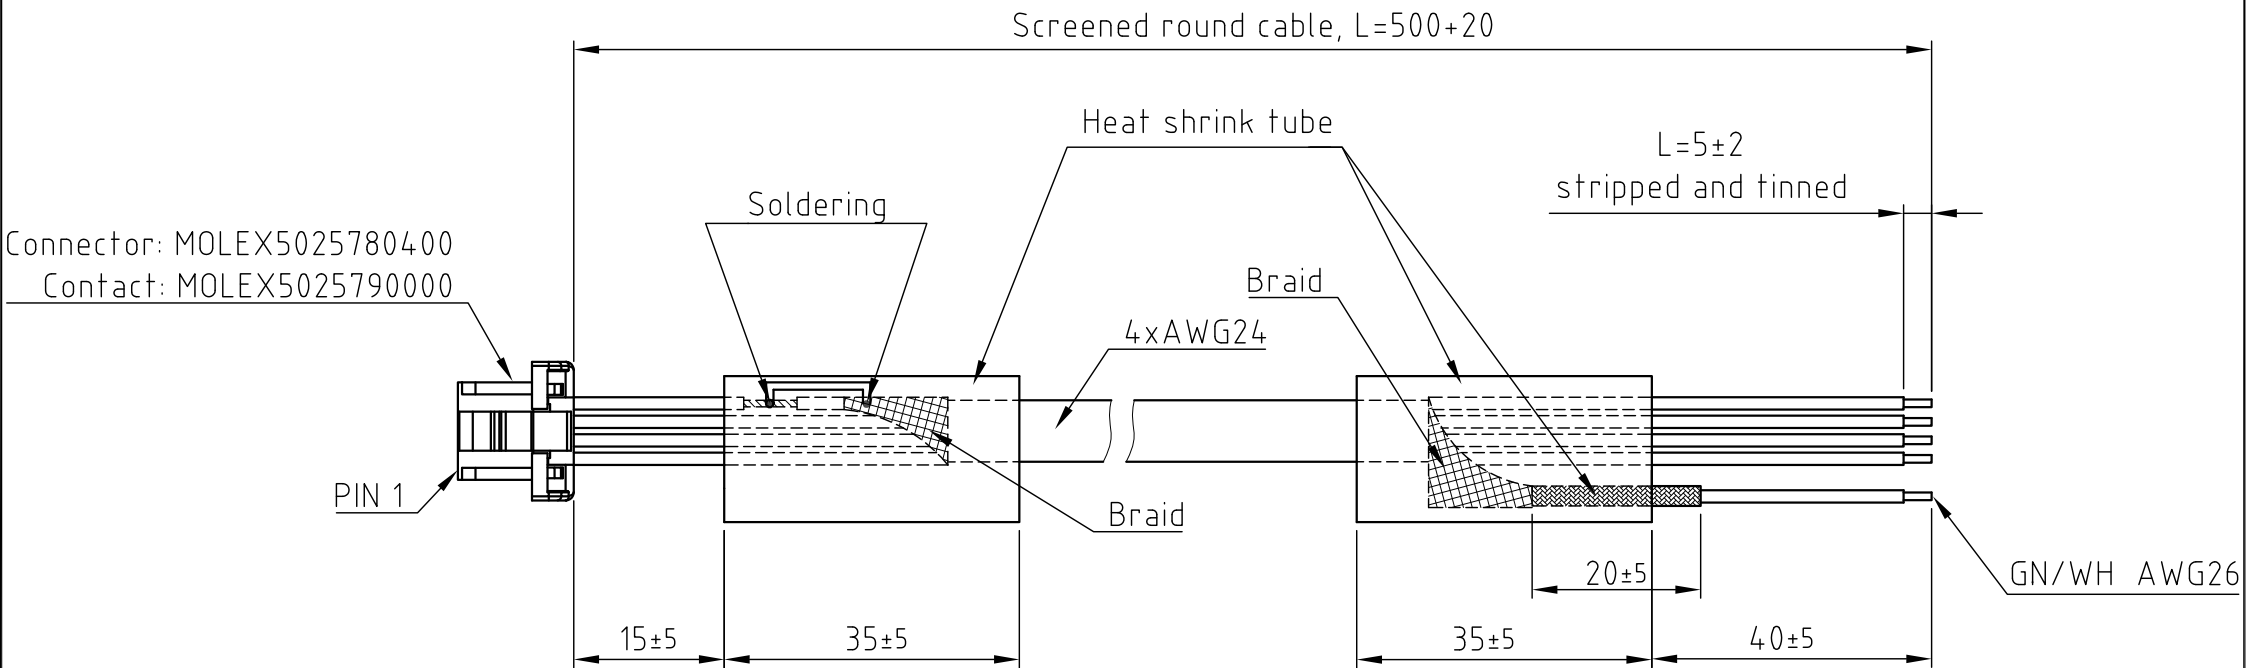

PIN ASSIGNMENT	
PIN NO.	COLOR
1	WH
2	GN
3	YE
4	BN
	GN/ WH

twisted twisted

CABLE SPECIFICATION		
Cable Length	mm	500
Cable Diameter	mm	6.6
Cable Material		PUR
Cable Color		Grey
Conductor Insulation		PO
Conductor / Cross - Section		(2x(2x0.25))C
Shielded		Yes
Bending Radius (flexible)		min. 7.5 x ϕ
Bending Radius (stationary)		min. 4 x ϕ

				 PLUG & DRIVE			APVD	R.S.	20.08.25	<i>EXTENSION CABLE</i>	
							CHKD	GYQ	20.08.25		
1	CABLE INFORMATION, WIRES SEQUENCE	04.11.25	L X	Surface specification DIN ISO 1302	General tolerances DIN ISO 2768-C	Work piece edge DIN ISO 13715	DRN	L X	20.08.25	DWG.NO	
REV	DESCRIPTION	DATE	APVD				SIGNATURE		DATE	ZK-MCM-4-500-C	