


DIMENSION (UNIT : mm)

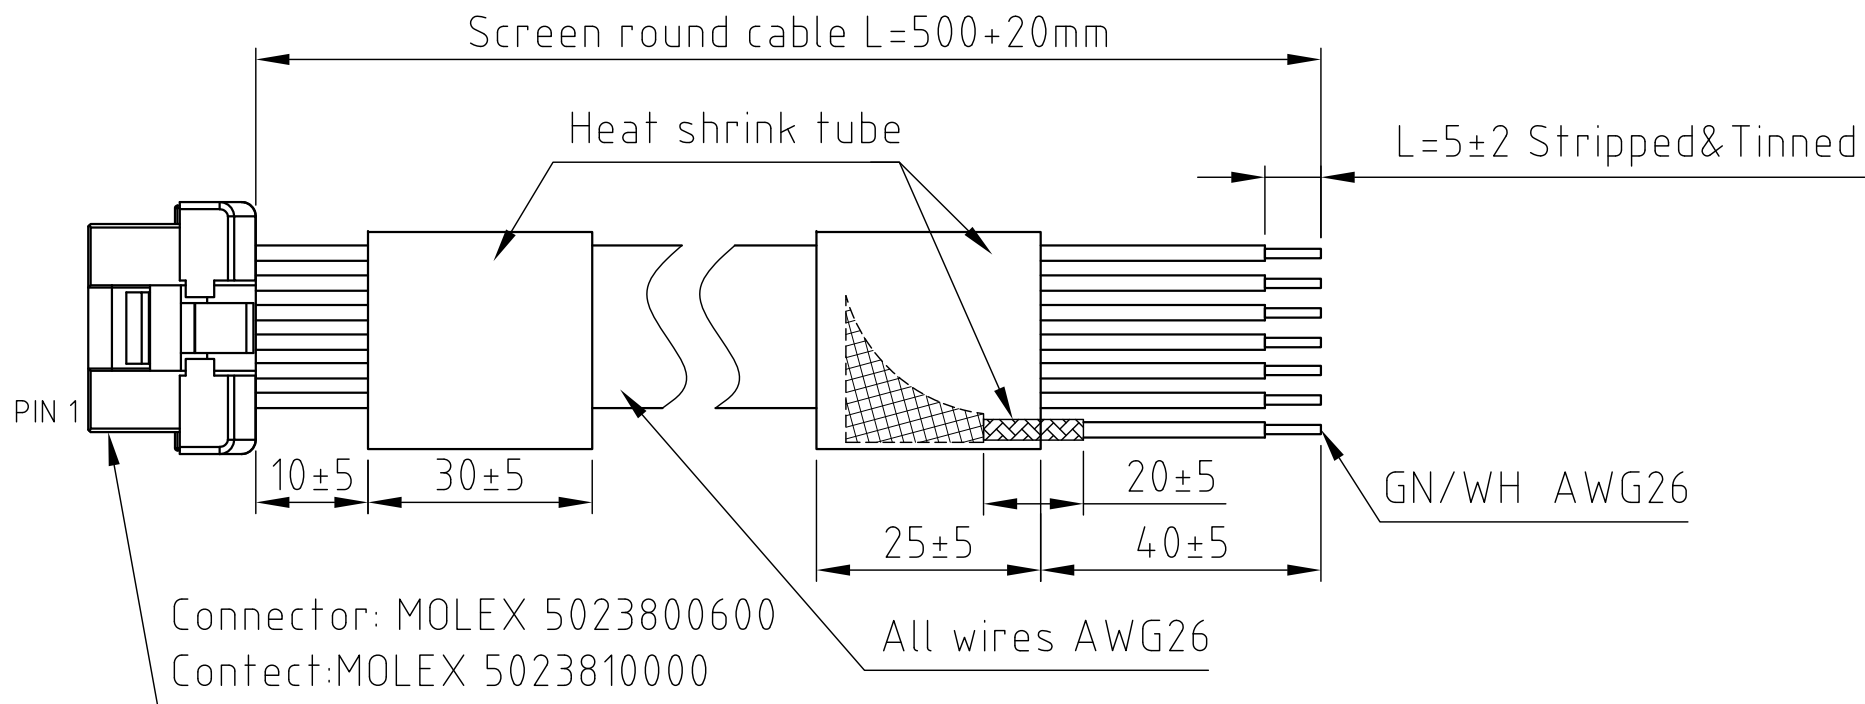

PIN ASSIGNMENT		
PIN NO.	COLOR	FUNCTION
PIN 1	RD	UB
PIN 2	GN	SCLK+
PIN 3	BN	SCLK-
PIN 4	WH	SDAT OUT+
PIN 5	GY	SDAT OUT-
PIN 6	BK	GND
	GN/WH	SHIELDING

CABLE SPECIFICATION		
Cable Length	mm	500
Cable Diameter	mm	5.6
Cable Material		PVC
Cable Color		Grey
Conductor Insulation		SRPVC
Conductor / Cross - Section		8xAWG26
UL type		UL2464
Shielded		Yes
Bending Radius (flexible)		min. 15 xϕ
Bending Radius (stationary)		min. 12 xϕ

				 PLUG & DRIVE			APVD	R.S.	20.08.25	<i>EXTENSION CABLE</i>	
							CHKD	GYQ	20.08.25		
1	ADD SHIELDING WIRE, CABLE INFORMATION	04.11.25	L X	Surface specification DIN ISO 1302	General tolerances DIN ISO 2768-C	Work piece edge DIN ISO 13715	DRN	L X	20.08.25	DWG.NO	
REV	DESCRIPTION	DATE	APVD				SIGNATURE		DATE	ZK-MCM-6-500-S	