
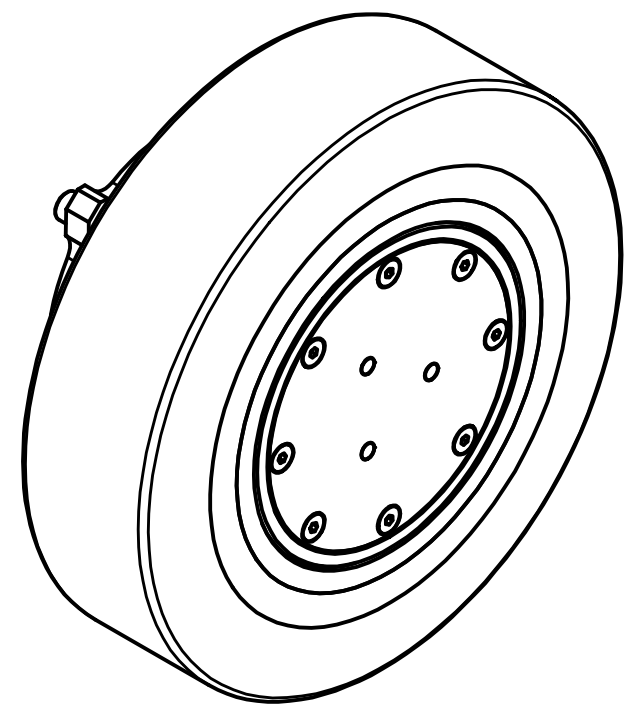
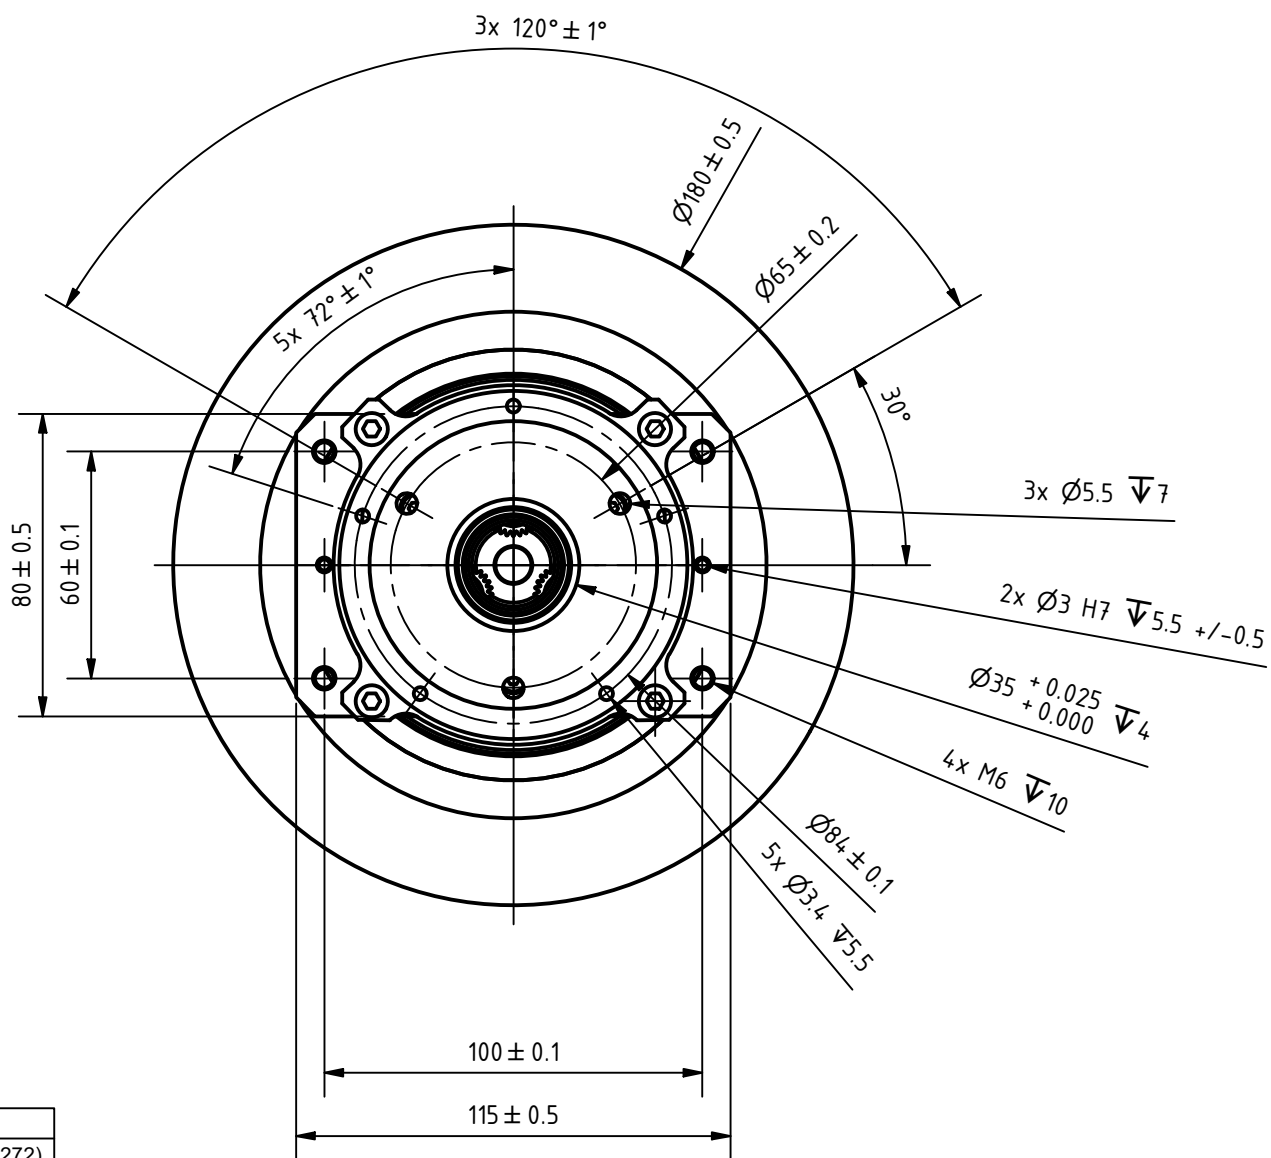
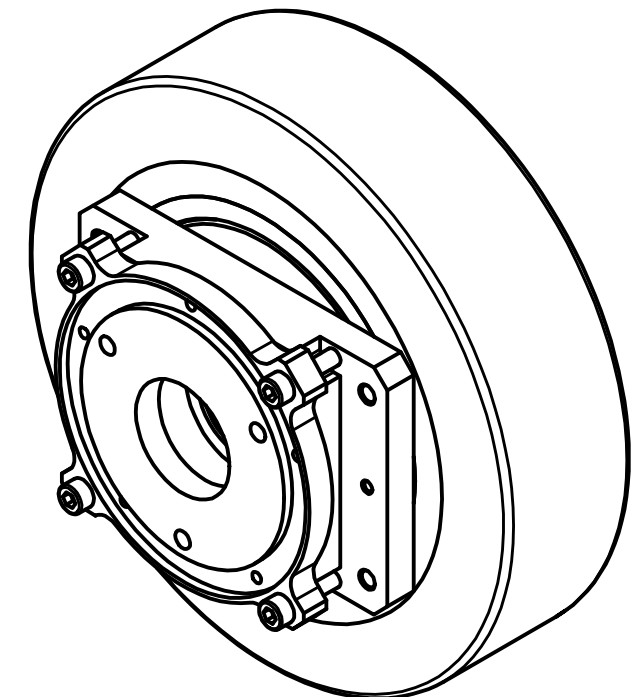


WHEEL DRIVE SPECIFICATION					
Reduction Ratio xx		11 (18225/1681)	16 (3969/256)	20 (7371/368)	26 (6993/272)
No. of Stages		2			
Rated Output Torque	Nm	20.27	22.01	23.03	23.13
Max. Output Torque	Nm	40.54	44.02	46.06	46.26
Rated Input Speed	rpm	3500	3500	3500	3500
Max. Input Speed	rpm	4685	5968	8304	8988
Backlash	°	<30 arcmin	<30 arcmin	<30 arcmin	<30 arcmin
Efficiency	%	94	94	94	94
Inertia	10 ⁻⁶ kg m ²	85	45	27	17
Load Capacity	kg	400			
Wheel Material		Vulkollan			
Ambient Temperature	°C	-15...+90			
Protection Class		IP54			

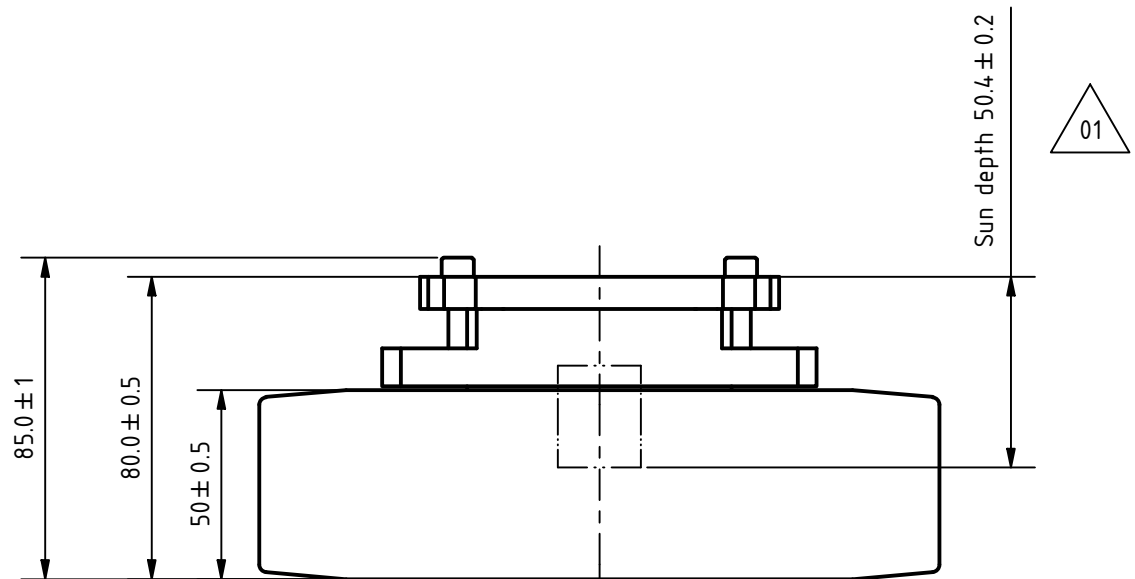

ISO 8015		ISO 1302		ISO 2768 cK		ISO 13715				Weight: ± 10% 4.5kg	
					Date	Name		WD18050-56xx-95X			
				Drawn	21.06.2021	Rehse_P					
				Reviewed	22.10.2021	Rehse_P					
02	updated specifications	Kolev_I	02.05.2024	Released	22.10.2021	Rehse_P		20002266			
01	sun depth changed	Kolev_I	12.02.2024								
REV	Rev. Text	Name	Date								
							State: Released		Rev: 02		CONFIDENTIAL
										Scale: 1 : 2	
										A3 Page 1	